

X-265B2407r

- 2U Rack-Mounted Chassis
- 2U power supply or CRPS redundant power supply
- 3 8035 hot-swappable fans
- 24 half-height PCI/PCIe expansion slots




EATX(12"*13")/CEB(12"*10.5")/ATX(12"*9.6")

Micro ATX(9.6"*9.6")/Mini-ITX(6.7"*6.7")

Rack-Mounted Chassis

*产品升级，具体以实物为准。

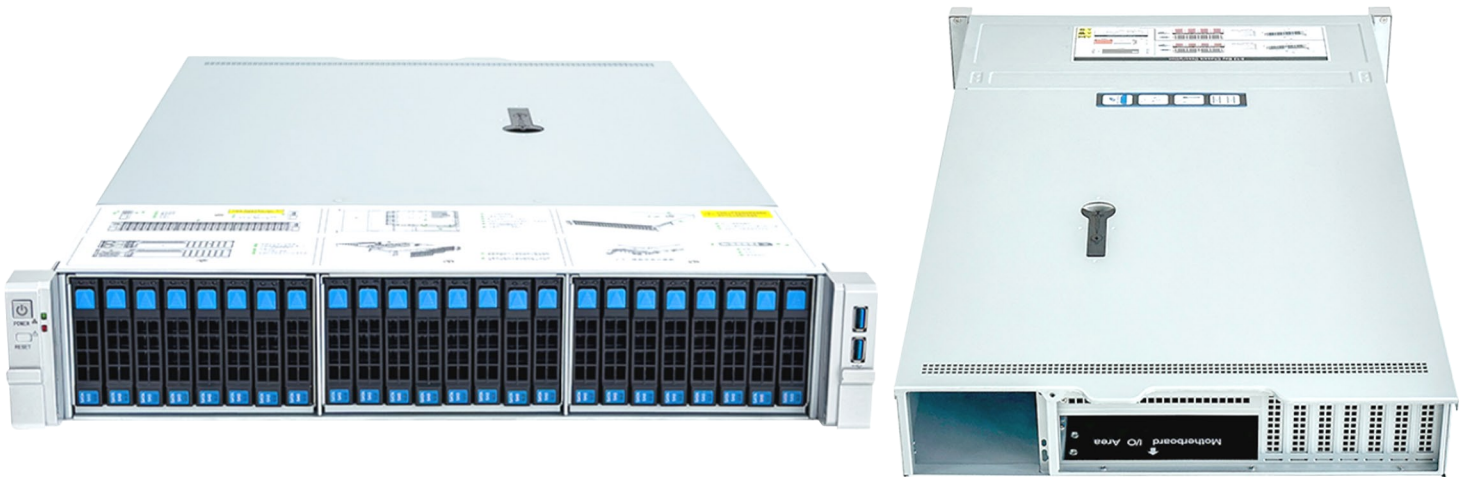

Dimensions	L650mm*W436mm*H90mm(including the width of the ears is 482MM)
Material	SGCC1.0mm
Front Panel Interfaces	1 power switch, 1 restart switch, 1 network indicator light, 1 system fault light, 2 USB 3.0
Heat Dissipation System	Supports intelligent-temperature control,3 pcs 8038 hot-swap fans
Compatible Motherboard	EATX(12"*13")/CEB(12"*10.5")/ATX(12"*9.6")/Micro ATX(9.6"*9.6")/Mini-ITX(6.7"*6.7")
Compatible Power Position	2U power supply/CRPS redundant power supply
HDD Bay	24*3.5"/2.5"hot-swap SATA/SAS drive bays,optional rear 1*2.5" hot-swap hard drives bays
Applicable hard drive	Compatible with SAS or SATA hard drives
HDD Backplane	12Gb/s SAS data backplane, supporting SGPIO
Expansion Slot	7 half-height PCI/PCIe expansion slots (vertical mounting)
Front Mask	Optional
Slide Rail	Optional
Packaging Details	Carton Box with PE foam and polybag
Package Size	D790*W560*H185mm
Single gross weight	14KG